

LB 15/2000

Hydraulic notching machine


The LB 15/2000 model permits notching with a fixed angle of 90°.

Four material hold downs guarantees clean cuts in all sheet metal thickness and high repetitive accuracy of the notches. It is also ideally suited for cuts on one side.

Because of the special design of the LB 15/2000 the blades achieve an extraordinarily high life even when notching special steel.

Further characteristics:

- Automatic cutting gap adjustment
- Maintenance-free lubrication system
- Integrated overload protection
- Extremely quiet



TRI-GIDE®


The patented Boschert 3 point ram guidance gives the machines it's famous precision and durability

The generously designed working table offers an ideal support for small and large sheet metal parts.

Special Features :

Movable electrical foot pedal, adjustable stroke, internal stop for shearing, 35 strokes per minute, Jog: single or continuous mode, Brass scales for accurate and easy set-up, four heavy duty stops with 500 mm (19") sliding bars and a plexiglas guard for easy viewing.

**Please ask for
the TRI-Gide
system warranty!**

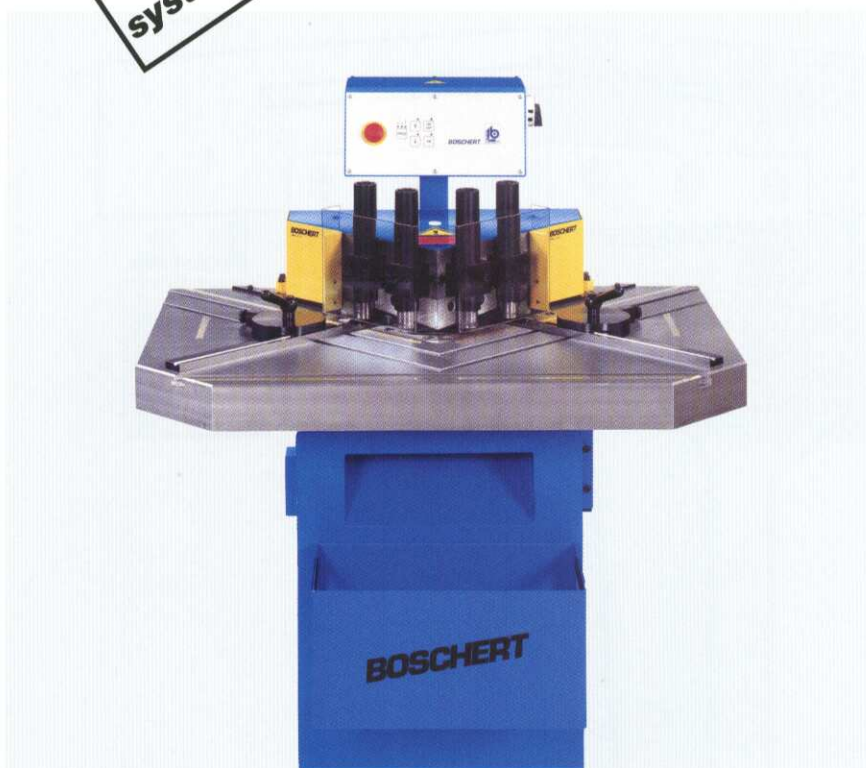

Picture: LB 15/2000

Technical data

Cutting capacity	8 mm (3/8") mild steel 6 mm (1/4") stainless steel
Length of cut	225 x 225 mm (8 7/8" x 8 7/8")
Power supply	5 KVA
Length	1350 mm (53.1")
Width	900 mm (35.4")
Height	1200 mm (47.2")
Width of table	1100 mm (43.3")
Length of table	789 mm (31.1")
Height of table	900 mm (35.4")
Weight	1100 kg



BOSCHERT

GmbH&Co.KG

D-79523 Lörrach, Postfach 7042
Germany
Telefon +49 7621 9593-0
Telefax +49 7621 55184
<http://www.boschert.de>
e-mail: infoak@boschert.de